




Mounting Suggestions

Harley-Davidson® FLHT, FLHX, FLTR, FLHR 2009-13 Cyclone Solo Seat and Frame Mounting Plate

Hardware Included:

- | | |
|------------------------------|---------------------------------|
| (2) Chrome Washers | (1) 3/4" Plastic Spacers |
| (2) Chrome Acorn Nuts | (1) 1/2" Plastic Spacers |
| (2) Black Rubber Washers | (2) Hex Bolts 1/4"-20x3/4" Long |
| (1) Hex Bolt 1/4"-20x2" Long | (2) Flat Washer 1/4" |

Install the 2" long bolt through the front mounting bracket (carpet side). Place the 3/4" long bolts with washers through the frame mounting plate's center holes, hold them in place with the rubber washers.

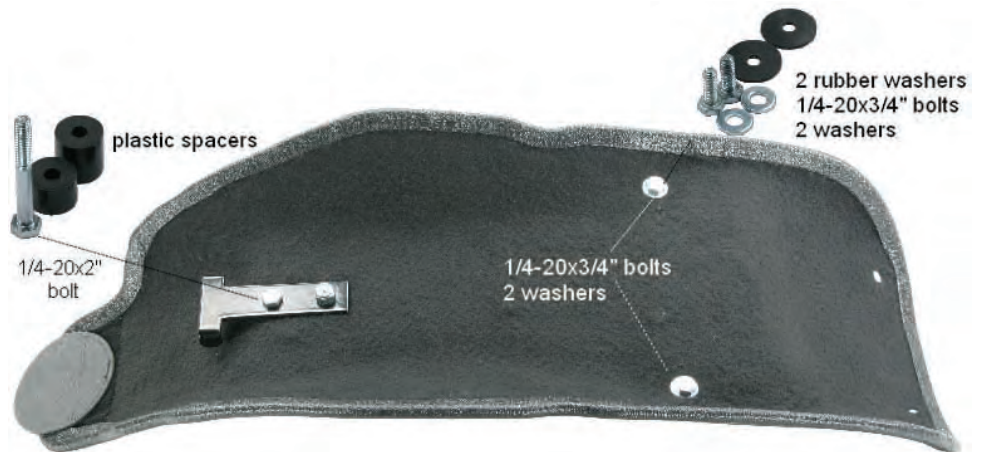

The Cyclone Solo seat can be positioned 1" further back on the frame mounting plate by drilling the two indented marks in the frame mounting plate with a 5/16" drill.



Flip the frame mounting plate over, place both plastic spacers onto the front 2" bolt. Now thread the front bolt into the 2nd hole in the front of the Cyclone Solo seat, but do not tighten. Align the two rear 3/4" bolts with the seat's rear threaded inserts. Tighten all three bolts with a 7/16" wrench.


Mounting Suggestions for Harley-Davidson® FLHT, FLHX, FLTR, FLHR 2009-up, Cyclone Solo Seat and Frame Mounting Plate

Continued from page 1



Engage the frame mounting plate's front T-bracket under the motorcycle's tongue bracket. Slide frame mounting plate forward until the two fender studs align with the holes in the rear of the frame mounting plate. The rear mounting holes can also be made into an oval shape with a file if a custom fit is desired.


The T-bracket can be bent up or down with pliers for the best fit at the dash. If there is a gap between the frame mounting plate and dash the hook and loop flexible nose extension disc (adjustable skirt wire cover) can be positioned under the dash to hide the dash mounting bracket or wires.

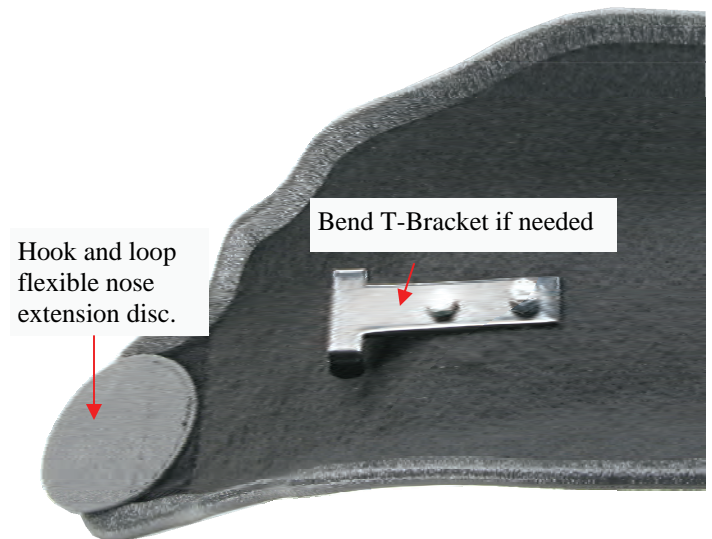

Use the supplied chrome ¼-20 acorn nuts and washers to fasten the frame mounting plate to the bike.

Mounting Suggestions for Harley-Davidson® FLHT, FLHX, FLTR, FLHR 2009-up, Cyclone Solo Seat and Frame Mounting Plate

Continued from page 2

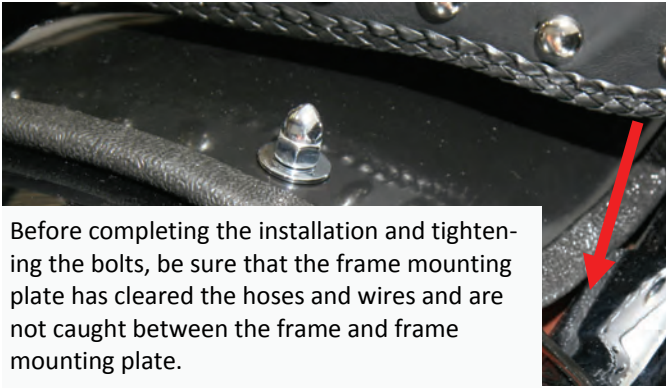

Before completing the installation and tightening the bolts, be sure that the frame mounting plate has cleared the hoses and wires and are not caught between the frame and frame mounting plate.

Make sure that the shock's air hoses and electrical wires are not pinched between the frame and fiberglass frame mounting plate.

Rear seats can be used with the Cyclone Solo if 78032 mounting nuts are used.



78032
chrome
mounting
nuts



Enjoy your new
Mustang seat

These steps are guidelines to help you install your new Mustang product. If you need further assistance please call us at 860-582-9633, Monday through Friday 9:00 - 5:30 Eastern or send an email to questions@mustangseats.com or visit our website at www.mustangseats.com

For care and maintenance of our seats, please go to our website under [“Support”](#).

Ref: Cyclone Solo Seat part #'s 76615, 76616, 76617, 76618, 76621

Frame mounting plate: 76624